



Zipper®

Modular system to segregate traffic flows.



- 1 Zipper® A: four anchorage points.
- 2 Zipper® B: three anchorage points.

1 Zipper® A
w: 280 mm
l: 280 mm
h: 125 mm




5,2 kg
8,21 kg of CO₂ equiv/u

2 Zipper® B
w: 280 mm
l: 280 mm
h: 125 mm




3,6 kg
6,78 kg of CO₂ equiv/u

Zipper® configurations.

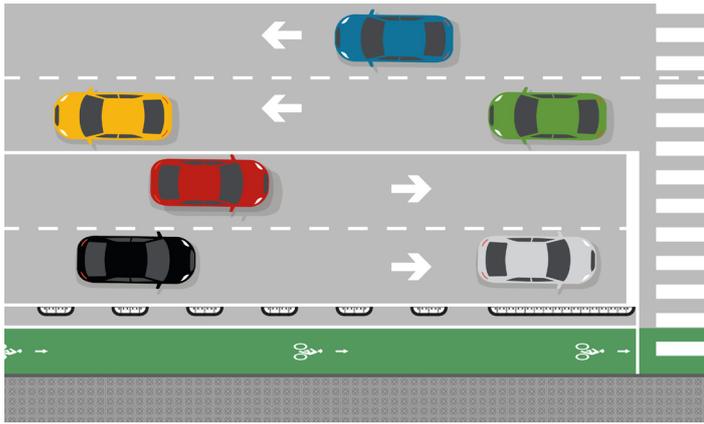

BAAB CONFIGURATION

A: 1120 mm (recommended distance between sets).

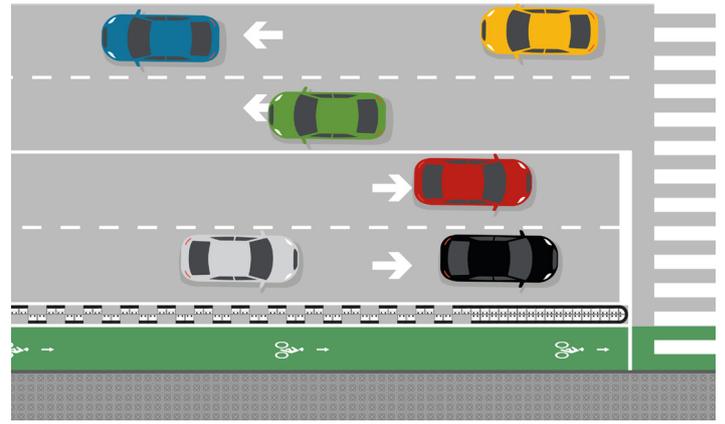

AA CONFIGURATION

A: 560 mm (recommended distance between sets).



CORNER RADII

Easily creates safe intersections.



MINI ROUNDABOUT

Builds roundabouts quickly for safe intersections.

Surface painting customization.



Zipper® A

Available colors



Zipper® B

Available colors



Made in.
EU

1st year of
production.
2017

Awards.
Finalist



PREMI
CATALUNYA
D'ECODISSENY
2017

Certificates.

“Design for all,
good practice”



Ecolabels.

DGQA



Design registration.

Ohim
003654680-0001/0002

China
201730280266-0
201730280265-5

United States Copyright
VA 2-125-281

United States Design Patent
US D842,683 S
US D854,956